
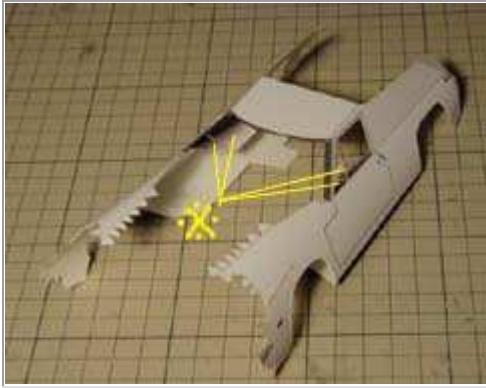



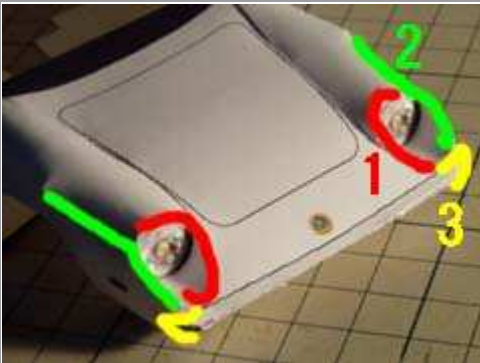

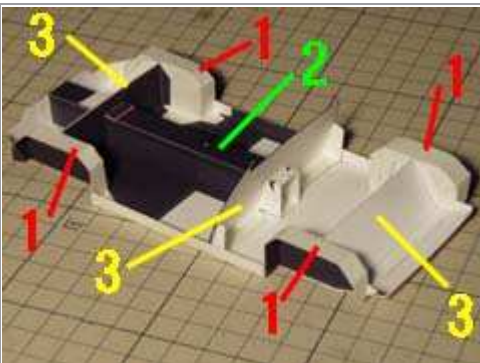

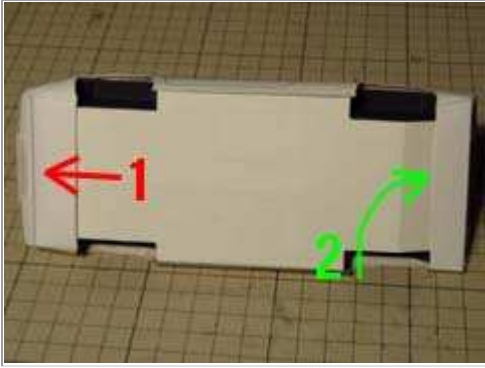


1		<p>Assembly of body</p> <p>The crease and the curl are applied to the body.  - ... The part in the window is not chopped off, and a lower part is left and tucked in internally.</p>
2		<p>The part in a rear window is not chopped off, and it bends it downward.</p>
3		<p>The part of the bonnet also applies the crease and the curl.  Please refer to the photograph.</p>
4		<p>The above-mentioned three parts are stuck together.</p>

5		<p>Parts lower in the nose are installed. At this point, only the part shown in red is pasted.</p>
6		<p>After the part of the headlight is made, the position shown by the figure in figure is sequentially first pasted. The headlight should be not able to be wrapped, and to do the space, please.</p>
7		<p>The part in the window tucked in is made overlap width, and the inside in the door is pasted. Meter panel is put up, and the steering wheel is installed.</p>
8		<p>Assembly of chassis Parts are installed in order to state in figures.</p>
9		<p>The seat is assembled. Please note how to fold. The seat is installed, and the shift lever is inserted and bonded.</p>

10

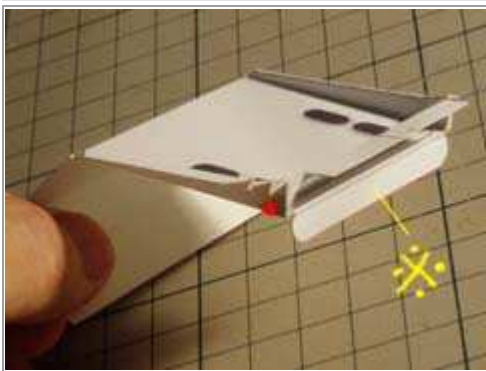

The body is connected to the chassis.  
It inserts it from an up-to-date side of the body, and a rear side is bent a little and put.  
The part where the part in a rear window was bent becomes overlap width.  
It bonds in the part on a body lower side.  
Next, if the tire is assembled, and installed, it is completion.

